


Liquid Ring Vacuum Pump




ADDITIONAL FEATURES

- Single stage design capable of operating to 29" Hg. Vacuum.
- No metal-to-metal contact offers quiet and virtually vibration-free performance.
- Fewer parts means lower cost and reduced maintenance.
- One drain connection provides safety for repairs and maintenance.
- Available in standard materials and special alloys.
- Continuous purge connections provides to aid in removal of abrasives and excess liquid draining.

DIMENSIONS (inches)

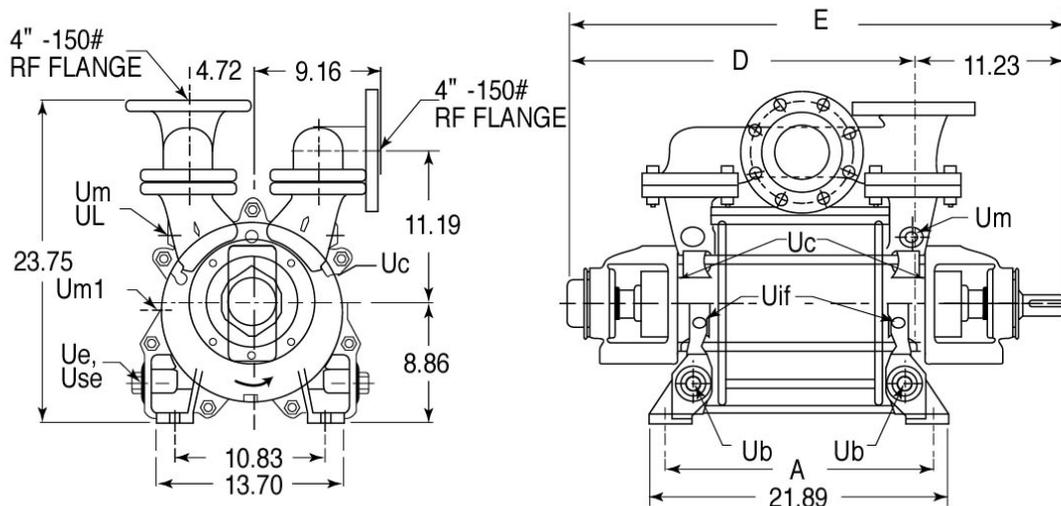

NOTE : Service Liquid is supplied to only one of the U_b connections.

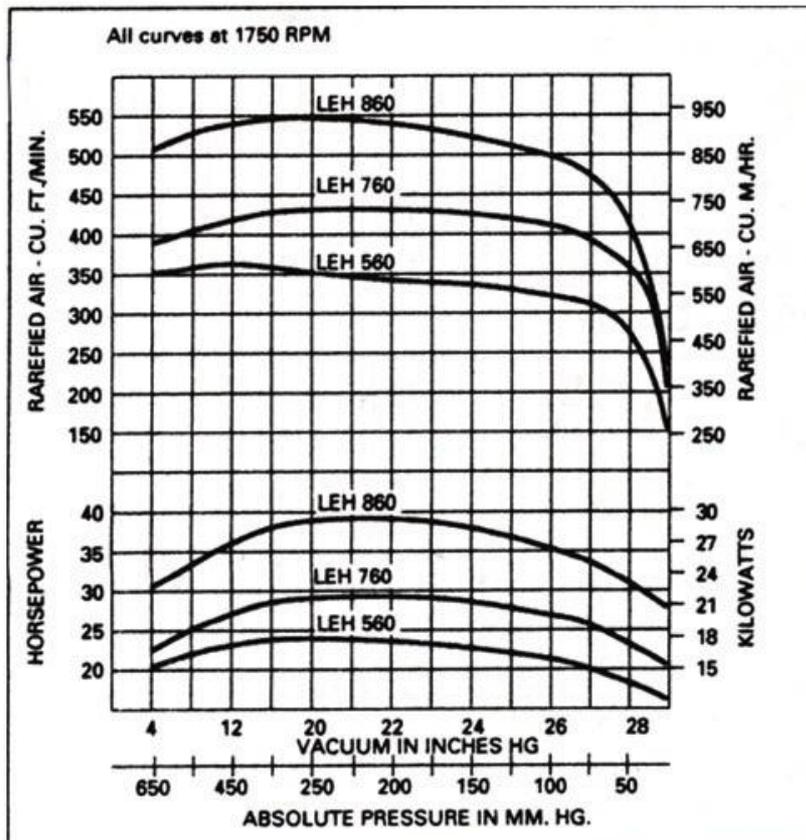

Capacity Table

Pump Model - LEH 560														
Speed (RPM)	6" Hg V. 608 Torr		12" Hg V. 455 Torr		18" Hg V. 303 Torr		22" Hg V. 201 Torr		24" Hg V. 150 Torr		28" Hg V. 49 Torr		28.9" Hg V. 25 Torr	
	acfm	HP	acfm	HP	acfm	HP	acfm	HP	acfm	HP	acfm	HP	acfm	HP
1750	353	21.5	365	23.2	355	24.1	340	23.7	338	22.8	280	18.3	155	16.1
1450	284	14.8	282	15.9	276	16.2	269	16.3	264	15.7	221	12.6	125	11.1
Pump Model - LEH 760														
1750	395	22.8	420	27.4	432	29.1	432	29.4	427	28.8	360	23.2	206	20.6
1450	311	15.7	323.5	18.8	335	20.0	338	20.2	336	19.8	291	15.9	195	14.1
Pump Model - LEH 860														
1750	518	31.8	542	36.2	550	39.1	542	39.4	524	38.3	419	31.0	235	27.9
1450	423	21.8	445	24.9	456	26.8	434	27.0	423	26.3	331	21.3	178	19.2



ENGINEERING DIVISION

E-305, Technopark 151 Yatap-dong, Bundang-gu, Seongnam city,
Kyunggi-do, 463-760, Korea

www.wooilht.co.kr

E-mail : wooilht@wooilht.co.kr

Tel : 82-31-707-0814

Fax : 82-31-707-0813